# Link/2500 companion

## Flawless design for a clever payment companion

- Specifically engineered for flexibility to accept all payment methods including NFC/Contactless, Apple Pay and Samsung Pay

- Slim and robust, dedicated to mobility

- Shorten time to market by leveraging TELIUM applications into a smart companion

ingenico
a Worldline brand

When paired with an iOS/Windows tablet or a smartphone,
Link/2500 Companion brings payment acceptance to any mobile point of sales.

## Highest security
The Link/2500 Companion is PCI-PTS 5.x certified. Its Telium Tetra OS uses the latest cryptographic schemes with future-proof key length.

## All payment options
In addition to EMV Chip & PIN and swipe, Link/2500 Companion supports the broadest range of contactless standards allowing NFC couponing and wallet use cases.

## Seamless integration
Link/2500 Companion facilitates the in-store integration due to its agnosticity. Thanks to WiFi and Bluetooth capability, connect any iOS, Android or Windows-based tablet or smartphone. Link/2500 Companion can be directly connected to the back office for transactions routing.

## Best fit to any use case
Due to its wide options panel and its two form factors, Link/2500 Companion is able to perfectly suit to any mobility use cases, and specifically in terms of compactness & autonomy.

## Designed for mobility
Featuring a pocket-sized, light weight and slim design the Link/2500 Companion is built for the most demanding use, wherever you go.

## User-friendly and intuitive interface
Featuring an edge design, Link/2500 Companion is user oriented with its bright 2.4'' colour display, a mechanical keypad and a USB-C connector which can be plugged upside down.
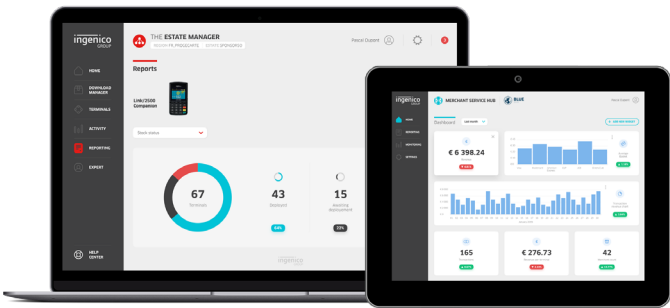
## Secure Telium TETRA OS
Backed by 40 years of experience and with its user-friendly interface, the Telium TETRA operating system includes the best security mechanisms embedded to protect transaction privacy and leverages Ingenico's unique portfolio of payment applications.

## Compatible with Ingenico's suite of services
Keeping the solutions connected, the Link/2500 Companion works in unison with Ingenico's supporting service platforms, meaning merchants will have access to business services such as back office reporting and e-receipt management. Software updates and day-to-day support deliver a hassle-free experience.

TELIUM **TETRA**

The Link/2500 Companion is supported by our Cloud Services

| | | | LINK/ 2500 SLIM | LINK/ 2500 STANDARD |
|---|---|---|---|---|
| **Processor** | • Application & Crypto processor | • Cortex A5 | ● | ● |
| **Memory** | • Internal | • 256 MB Flash, 128 MB RAM | ● | ● |
| | | • 128 MB Flash, 128 MB RAM | Option | Option |
| **OS** | | • Telium TETRA | ● | ● |
| **SIM / SAM** | | • Up to 2 | N/A | Option |
| **Card readers** | • Magstripe | • ISO 1/2/3, 100K lifespan | ● | ● |
| | • Smart card | • EMV Level 1, 50K lifespan | ● | ● |
| | • Contactless | • EMV / iSO14443 | Option | Option |
| **Display** | • Colour | • 2.4" colour display, backlit, QVGA (240x320 pixels) | ● | ● |
| **Keypad** | • Mechanical | • 20 keys, raised marking | ● | ● |
| **Audio** | • Buzzer | | ● | ● |
| | • Speaker | | N/A | Option |

| | | | LINK/ 2500 SLIM | LINK/ 2500 STANDARD |
|---|---|---|---|---|
| **Terminal connectivity** | • LAN | • Bluetooth | ● | Option |
| | | • WiFi (Dual band) | N/A | Option |
| | • Apple IAP Chip | | Option | Option |
| | • Multicom | • All connectivities in one single device | N/A | Option |
| **Terminal connections** | • USB Type C | • Host & Slave (3K insertions) | ● | ● |
| **Batteries** | • Li-ion | • 1200mAH (removable) | N/A | ● |
| | | • 600mAH | ● | N/A |
| **Power supply** | • Terminal | • 5V 1A | Option | Option |
| **Terminal size** | • L x W x H | • 129 x 70 x 13 mm (5.07 x 2.75 x 0.51) | ● | N/A |
| | | • 129 x 70 x 17 mm (5.07 x 2.75 x 0.67) | N/A | ● |
| **Weight** | • Full featured | • 120g (4.23oz) | ● | N/A |
| | | • 155g (5.46oz) | N/A | ● |
| **Environment** | • Charging Temperature | • 0°C to +40°C (32°F to 104°F) | ● | ● |
| | • Operating Temperature | • -10°C to +50°C (14°F to 122°F) | ● | ● |
| | • Storage Temperature | • -20 to +55°C (-4°F to 131°F) | ● | ● |
| | • Operating Humidity | • 85% non-condensing at 40°C (104°F) | ● | ● |
| **Accessory** | • Cable | • USB A to USB C: 1.5m | ● | ● |
| **Security** | | • PCI PTS 4.x & 5.x online & offline certified | ● | ● |

**www.ingenico.com**

**ingenico**
a Worldline brand