
Link/2500 integration

Clever payment companion designed with integration in mind



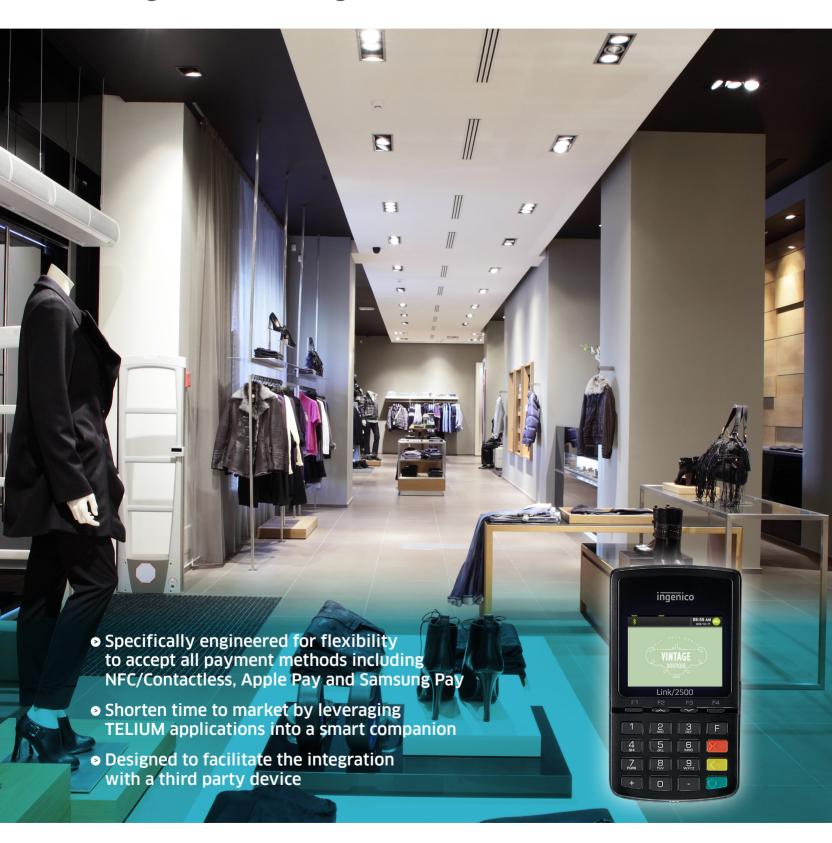

Highest security

The Link/2500 Integration is PCI-PTS 5.x certified. Its Telium TETRA OS uses the latest cryptographic schemes with future-proof key length.

All payment options

In addition to EMV Chip & PIN and swipe, Link/2500 Integration supports the broadest range of contactless standards allowing NFC couponing and wallet use cases.

Designed for integration

The Link/2500 Integration is the ideal product to integrate payment into a third party device. It is lightweight, features a slim design, as well as mechanical and electronic integration to charge and communicate with a third party device.

Seamless integration

Link/2500 Integration facilitates the in-store integration due to its agnosticity. Link/2500 can be pair with any iOS, Android or Windows-based tablet or smartphone to convert it into a point of sale.



User-friendly and intuitive interface

Featuring a cutting edge design, the Link/2500 Integration is user oriented with its bright 2.4" colour display and a mechanical keypad.

Compatible with Ingenico's suite of services

Keeping the solutions connected, the Link/2500 Integration works in unison with Ingenico's supporting service platforms, meaning merchants will have access to business services such as back office reporting and e-receipt management. Software updates and day-to-day support deliver a hassle-free experience.





		I.	
Processor	Application & Crypto processor	• Cortex A5	•
Memory	• Internal	• 256 MB Flash, 128 MB RAM	•
os		• Telium TETRA	•
Card readers	Magstripe Smart card Contactless	• ISO 1/2/3, 100K lifespan • EMV Level 1, 50K lifespan • EMV / iSO14443	•
Display	• Colour	• 2.4" colour display, backlit, QVGA (240x320 pixels)	•
Keypad	• Mechanical	• 20 keys, raised marking	•
Audio	• Buzzer		•

Terminal connectivity	LAN Apple IAP Chip	Bluetooth Back connector for charging USB data exchange Certified MFI in BT & USB Bluetooth USB data exchange
Battery	• Li-ion	• 600mAh
Terminal size	• L x W x H	• 129x70x13 mm (5.07x2.75x0.51")
Weight	• Full featured	• 120 g (5.46 oz)
Environment	Charging Temperature Operating Temperature Storage Temperature Operating Humidity	• 0°C to +40°C (32°F to 104°F) • -10°C to +50°C (14°F to 122°F) • -20°C to +55°C (-4°F to 131°F) • 85% non-condensing at +40°C (104°F)
Security		PCI PTS 5.x online & offline certified



